
Single Acrylic Screens

Post Style Bracket



Trendway >

Easily convert your open plan office to a more secluded environment with Trendway's new acrylic screens. There are many options to choose from to quickly retrofit your space when it's time to get your team back to the office – safely.

Single Screens | Post Style Bracket

A single acrylic panel screw mounts onto the work surface. With heights from 24" to 36" and widths of 24" to 72", adapt almost any workstation with division to minimize risk. Available in frosted and clear options for varying levels of privacy. Optional 4" access slot is also available.




full screen




left screen with 4" access slot option

Single Screen | Post Style Bracket | Screw Mount

Dimensions		Insert Material		Catalog #
Width	Height	Clear Acrylic	Frosted Acrylic	
24"	24"	\$420	\$456	SCNSMPS2424
30"		\$430	\$495	SCNSMPS3024
36"		\$499	\$573	SCNSMPS3624
42"		\$510	\$575	SCNSMPS4224
48"		\$520	\$580	SCNSMPS4824
54"		\$530	\$825	SCNSMPS5424
60"		\$540	\$835	SCNSMPS6024
66"		\$684	\$840	SCNSMPS6624
72"		\$695	\$851	SCNSMPS7224
24"	30"	\$420	\$494	SCNSMPS2430
30"		\$447	\$648	SCNSMPS3030
36"		\$499	\$655	SCNSMPS3630
42"		\$510	\$660	SCNSMPS4230
48"		\$520	\$665	SCNSMPS4830
54"		\$578	\$1,288	SCNSMPS5430
60"		\$590	\$1,295	SCNSMPS6030
66"		\$684	\$1,299	SCNSMPS6630
72"		\$695	\$1,310	SCNSMPS7230
24"	36"	\$499	\$571	SCNSMPS2436
30"		\$510	\$648	SCNSMPS3036
36"		\$658	\$803	SCNSMPS3636
42"		\$670	\$805	SCNSMPS4236
4"		\$680	\$810	SCNSMPS4836
54"		\$685	\$1,288	SCNSMPS5436
60"		\$695	\$1,295	SCNSMPS6036
66"		\$1,000	\$1,300	SCNSMPS6636
72"		\$1,000	\$1,310	SCNSMPS7236

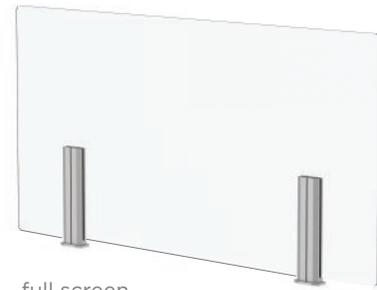

full screen

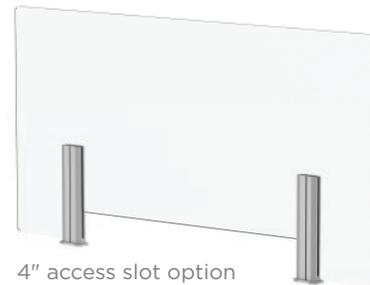


4" access slot option

Available:

- With or without 4" access slot
- Clear or Frosted acrylic
- Standard or Premium (+\$12) color bracket paint finishes



Acrylic Screen Dimensions | Post Style Bracket

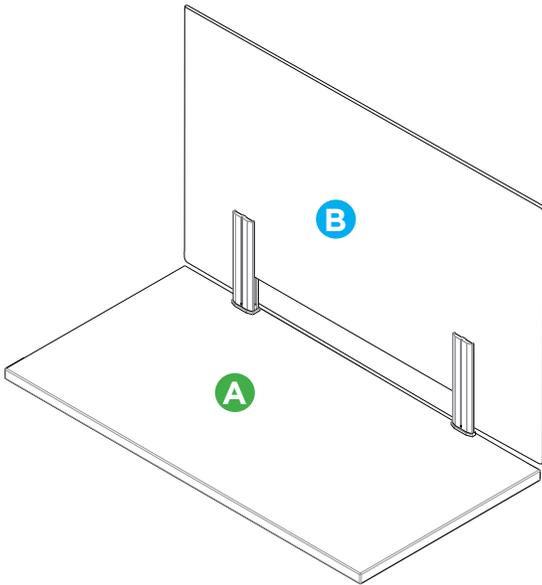

Model SCNSMPS4830
48"Wx30"H

Work surface needs to be a minimum of
44.625"W to fit this screen model.

All screen dimensions are identical between
adhesive and screw mounting methods.

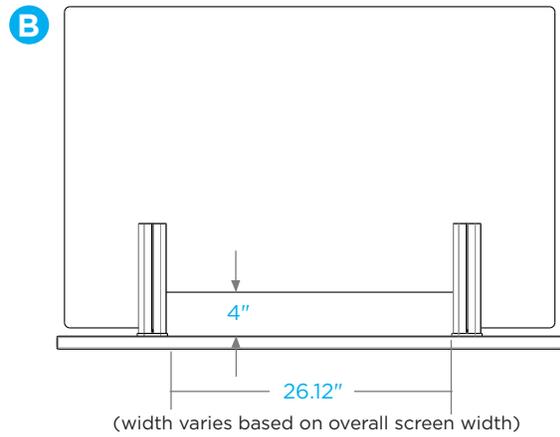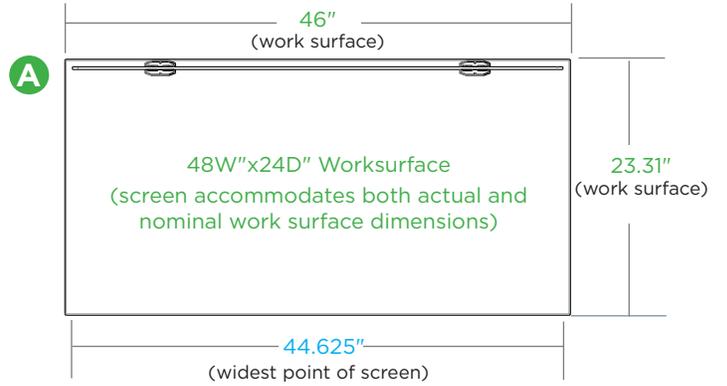

Cleaning Instructions for Acrylic Screen

First time setup: Do not attempt to clean immediately after removing the protective paper because the static electricity will attract dust and particles. Wait a day for the static to dissipate before cleaning.

Step 1

Begin by removing excess dust or dirt from the surface of the acrylic with an air hose or blow dryer set to its coolest setting (never heat acrylic). Hold the blow dryer at a 45-degree angle several inches away from the acrylic and run side-to-side down the surface. Wipe any remaining dust with a soft, lint-free cotton microfiber cloth.

Step 2

Once excess grime has been blown away, spray a nonabrasive acrylic cleaner, such as Brillianize or Novus No. 1 onto a one- or two-foot-square section of acrylic. (For an on-hand alternative, a solution of mild dish soap and water works well too.). Never use abrasive cleaners or anything containing Ammonia such as Formula 409®, Windex® or Fantastik®. Ammonia will cause your acrylic to get cloudy and you can't reverse the effects. Bleach solutions and disinfectants are not recommended and can cause damage to the acrylic.

Once the cleaner has been applied, use a soft, lint-free cotton microfiber cloth to gently wipe the surface down, again being careful to make contact only with the portion of the surface that already has cleaner on it. Continue applying the cleaner and wiping it off in small sections until you've finished the entire surface. Do not use a paper towel to clean acrylic because it can cause scratching.

Trendway >

Fellowes Brands. | FAMILY BUSINESS
SINCE 1917

TRENDWAY HEADQUARTERS | Holland, Michigan

CHICAGO | LOS ANGELES | WASHINGTON, DC

Trendway.com | May 2020